


**ZONEXCOMMANDER (PLUS)**  
**A communicating thermal management system**


**ZNXPLUS – Communicating Command Center**

Includes: Configured TCIP, Operating Software, Cables and OLAT Sensor


**NUMBER OF THERMOSTATS / DEVICES**

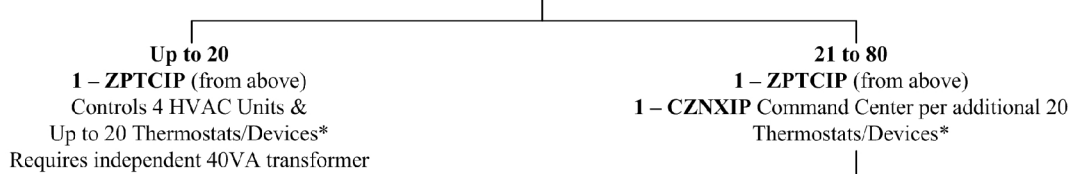


**NUMBER OF ZONED UNITS**

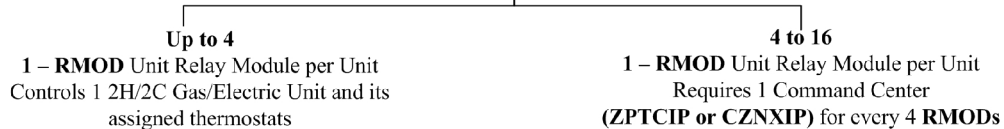

**THERMOSTATS**

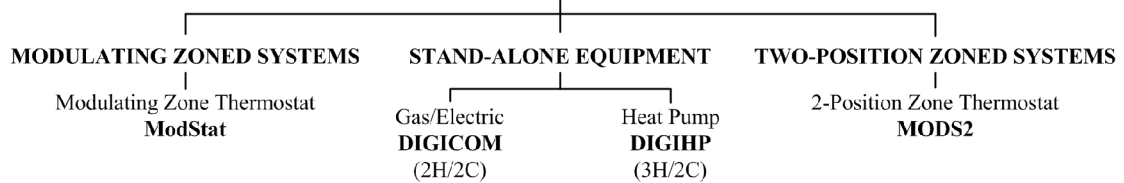

**ZONE DAMPERS**

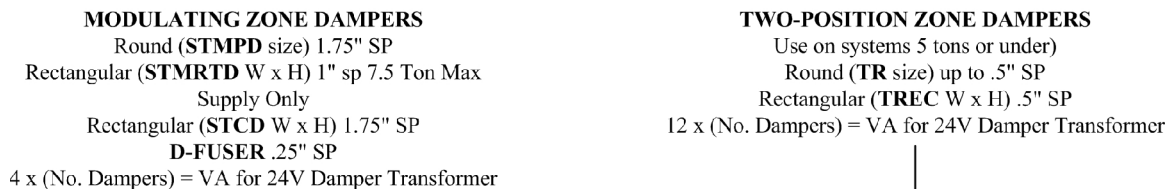

**BYPASS DAMPERS**



**BYPASS CONTROLLER**  
**101ASPC** – static pressure control  
24V 40VA Transformer

**COMMUNICATING ACCESSORIES (Optional)**



\*Devices include Part #s: **ModStat, MODS2, DIGICOM, & DIGIHP** thermostats and **RLYCOM**.  
Each Command Center supports up to 20 thermostats. If multiple **RMODs** are utilized, the 20 thermostats must be allocated among the 1-4 **RMODs** per Command Center.